


3.2 x 1.5 x 0.8mm Micro-miniature SMD

32.768kHz

- Ultra-miniature ceramic package 3.2 x 1.5 x 0.8mm
- Frequency tolerance from ± 5 ppm at 25°C
- RoHS compliant and lead free
- Low ageing, high shock and vibration resistance
- Uses include real-time clocks and battery operated devices



DESCRIPTION

X3215 crystals provide 32.768kHz in an ultra-miniature package. The part is designed to provide the smallest possible component size for real-time clock applications. The micro-miniature size and rugged construction make them ideal for real time clocks and battery powered, hand-held equipment.


SPECIFICATION

Nominal Frequency:	32.7680kHz
Calibration Tolerance at 25°C: (drive level at 0.1μW)	± 20 ppm standard, ± 10 ppm available (For 9pF = ± 20 ppm)
Crystal Cut:	X-cut
Load Capacitance (CL):	7pF, 9pF, 12.5pF
Equivalent Series Resistance (ESR):	80kΩ max.
Drive Level:	0.1μW typical, 0.5μW max.
Temperature Coefficient:	-0.04x10 ⁻⁶ /°C ² max. (Parabolic function)
Turning point Temperature:	+25°±5°C
Shunt Capacitance:	1.5pF typical, 2.0pF max.
Ageing:	± 3 ppm/year max.
Insulation Resistance:	500MΩ minimum @100VDC
Operating Temperature Range:	-40° to +85°C
Storage Temperature Range:	-40° to +125°C
Packaging:	8.0mm EIA tape and reel, 4.0mm pitch, 180mm diameter reel. 3k pieces/reel


ENVIRONMENTAL SPECIFICATION

RoHS Status:	RoHS Compliant and lead free
Operable Temperature Range:	-40° to +85°C
Storage temperature Range:	-40° to +125°C
Shock:	± 5 ppm max. freq. deviation. Free drop onto a hard wooden board from a height of 75cm. x 3.
Vibration:	± 5 ppm max. freq. deviation 3000g, 1/2 sine wave, 0.3ms. Duration 2 hours each direction, three mutually - perpendicular planes.
Solder Heat Resistance:	± 5 ppm max. 260° for 10 seconds, two times.
Temperature Cycling:	± 10 ppm max. 100 cycles of -40 to +85°C, 30 minutes soak time at each temperature extreme.
High and Low Temperature Operating Life:	± 7 ppm max. +85°C for 500 hours, ± 10 ppm max., -40°C for 500 hours.
Highly Accelerated Stress Test:	± 10 ppm max. +60°C, 90 to 95% relative humidity for 500 hours.

OUTLINE & DIMENSIONS

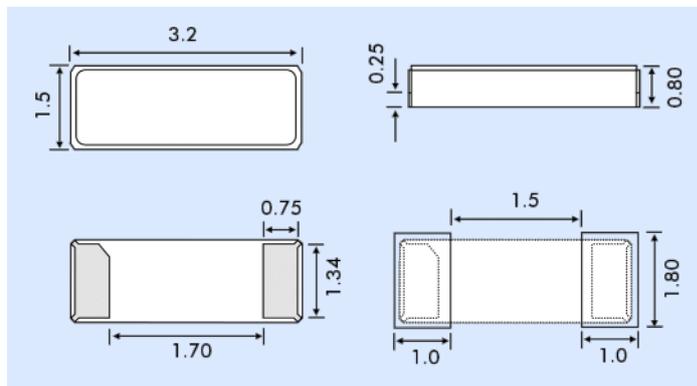

PART NUMBER AND SPECIFICATION

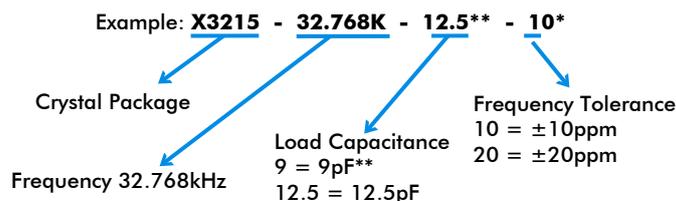

This part number example given will provide a 32.768kHz crystal in X3215 package with ± 10 ppm calibration tolerance at 25°C and a load capacitance of 12.5pF.

* Frequency tolerance is that frequency measured at 25°±5°C. If a frequency tolerance value is not given ± 20 ppm is assumed.

** For 9pF load capacitance only ± 20 ppm calibration tolerance is offered.

STABILITY OVER TEMPERATURE

X-Cut Crystal

